




ERGOLINE ELEMENTS

LAMPS



BENCH
24 UV LED Board Spectra

FACIAL
4 UV LED Board Spectra

SIDE
5 UV LED Board Spectra

SPAGHETTI
N/A

CANOPY
15 UV LED Board Spectra

SHOULDER
40 x UVA LEDs

LED TECHNOLOGY
672 x Synergy Technology
(Nature Light + Beauty Light)

1,624 x UVA LEDs
384 x UVB LEDs

POWER



RATED VOLTAGE
208 - 230 V

RATED AMP DRAW 3 Ø
24

RATED FREQUENCY
60 Hz

RATED AMP DRAW 1 Ø
N/A


RATED BREAKERS
30 amp 3-pole

POWER CONSUMPTION RATING
7,300 W

MAINS POWER CONNECTION

- The unit is configured from the factory for connection to 3-Phase power. Single Phase is not Available.
- A 1" liquid-tight connector is provided

PRODUCT SPECIFICATIONS



NOISE LEVEL 1M AWAY FROM DEVICE
74 dB

WEIGHT
approx. 1,400 lbs


NOISE LEVEL INSIDE THE DEVICE
< 80 dB

UNIT FOOTPRINT
94 1/2" X 90 9/16"

LOAD ON THE ACRYLIC PANEL
max. 330 lbs

OPERATING TEMPERATURES
59-89 °F






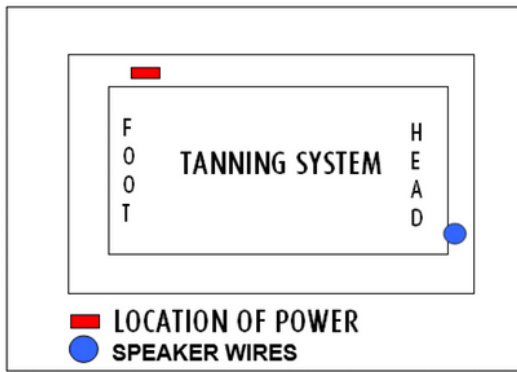


*Owner is responsible for all wiring up to the terminal block connection inside the device. As well as ensuring the wire is properly sized for the amp draw and breaker selection per the electrical code in their area.

**Minimum footprint size for proper operation and cooling of the unit. Does not account for door sizes or obstructions in the room. (Footprint measurement is not the room size)

MEASUREMENTS

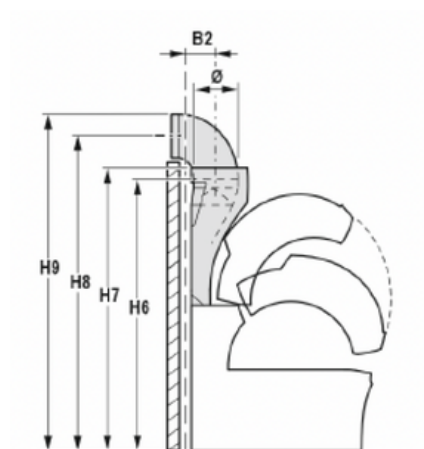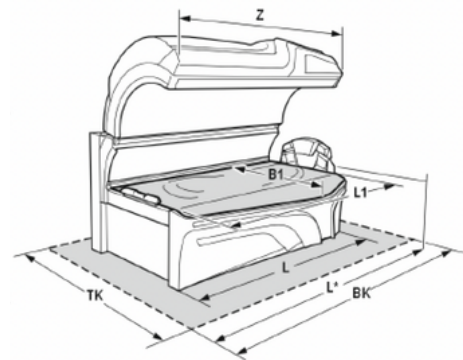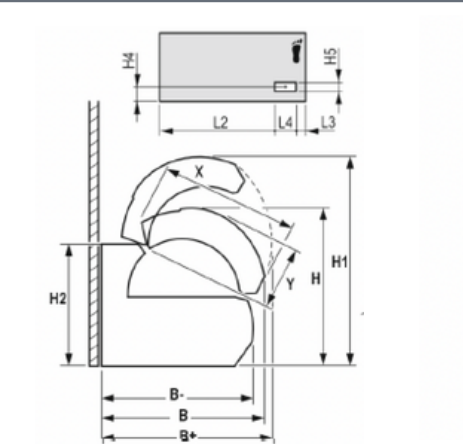

	in.	mm.
B+	57,31	1,455
B	57,31	1,455
B-	56,30	1,430
B1	32,31	820
B2	7,68	195
L	88,43	2,247
L*	88,68	2,253
L1	86,62	2,200
L2	70,46	1,790
L3	13,12	334
L4	4,75	120
L5	23,62	600



	in.	mm.
L6	3,93	100
L7	44,12	1,120
X	44,56	1,132
Y	26,06	662
Z	87,60	2,225
H	58,12	1,477
H1	82,68	2,100
H2	43,31	1,100
H4	21,62	550
H5	4,75	120
H6	73,42	1,865
H7	75,67	1,922
H8	87,75	2,229
H9	92,68	2,354
O	11,81	300
BK	94,5	2,400
TK	90,56	2,100