



ERGOLINE PULSE 40/3 PLT

LAMPS



BENCH
16 @160W 71"

FACIAL
96 x UVA LEDS

SIDE
N/A

SPAGHETTI
2 x 8W

CANOPY
24 @ 160W 71"

SHOULDER
N/A

LED TECHNOLOGY
96 x UVA-LEDs

POWER



RATED VOLTAGE
230 V

RATED AMP DRAW 3 Ø
21

RATED FREQUENCY
60 Hz

RATED AMP DRAW 1 Ø
33 (35 with AC)


RATED BREAKERS
30 amp 3-pole
50 amp 2-pole

POWER CONSUMPTION RATING
6,700 W (7,100 W with AC)

MAINS POWER CONNECTION

- The unit is configured from the factory for connection to 3-Phase power.
- A 1" liquid-tight connector is provided

PRODUCT SPECIFICATIONS



NOISE LEVEL 1M AWAY FROM DEVICE
66 dB

WEIGHT
approx. 960 lbs


NOISE LEVEL INSIDE THE DEVICE
< 70 dB

UNIT FOOTPRINT
94 1/2" X 82 3/4"

LOAD ON THE ACRYLIC PANEL
max. 330 lbs

OPERATING TEMPERATURES
59-89 °F





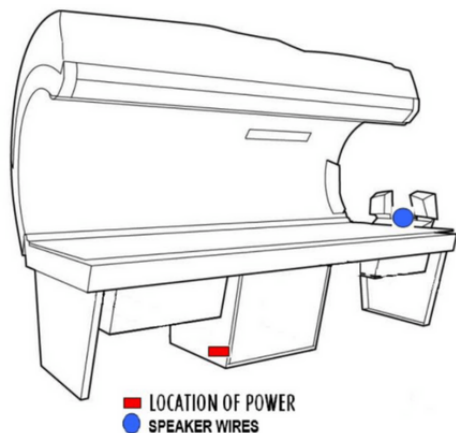

*Owner is responsible for all wiring up to the terminal block connection inside the device. As well as ensuring the wire is properly sized for the amp draw and breaker selection per the electrical code in their area.

**Minimum footprint size for proper operation and cooling of the unit. Does not account for door sizes or obstructions in the room. (Footprint measurement is not the room size)

MEASUREMENTS

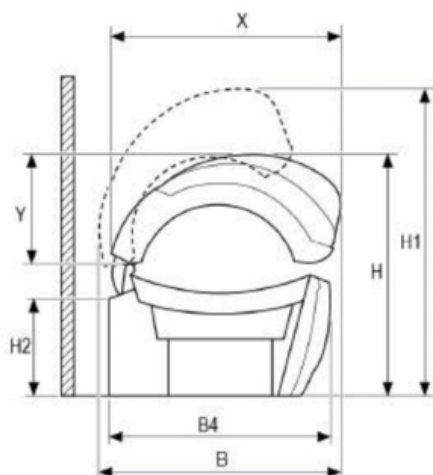

	in.	mm.
B	53,94	1,370
B1	32,87	835
B4	50	1,270
L	85,04	2,160
L*	88,98	2,260
L1	84,65	2,150
H	49,61	1,260
H1	6,13	1,705
H2	18,11	460
X	49,76	1,264
Y	27,13	689
Z	85,04	2,160
BK	94,49	2,400
TK	82,68	2,100

