




ERGOLINE VITALITY 42/3 PLT

LAMPS



BENCH
16 @ 160W 71"

FACIAL
126 x UVA LEDs

SIDE
8 @ 160W 71"

SPAGHETTI
2 x 8 W UV PLT

CANOPY
18 @ 200W 71"

SHOULDER
40 x UVA LEDs

LED TECHNOLOGY
Face & Shoulder: 166 x UVA-LEDs

POWER



RATED VOLTAGE
230 V

RATED AMP DRAW 3 Ø
27

RATED FREQUENCY
60 Hz

RATED AMP DRAW 1 Ø
43


RATED BREAKERS
35 amp 3-pole
60 amp 2-pole

POWER CONSUMPTION RATING
9,000 W

MAINS POWER CONNECTION

- The unit is configured from the factory for connection to 3-Phase power.
- A 1" liquid-tight connector is provided

PRODUCT SPECIFICATIONS



NOISE LEVEL 1M AWAY FROM DEVICE
62.5 dB

WEIGHT
approx. 1,096 lbs


NOISE LEVEL INSIDE THE DEVICE
< 72.5 dB

UNIT FOOTPRINT
98 1/2" X 90 1/2"

LOAD ON THE ACRYLIC PANEL
max. 330 lbs

OPERATING TEMPERATURES
59-89 °F





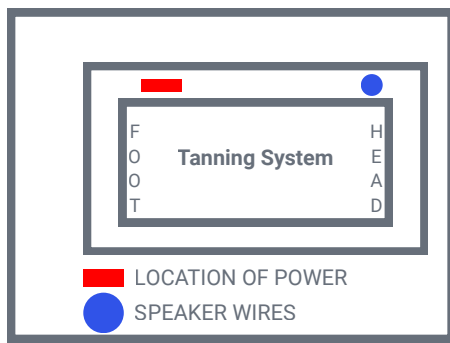

*Owner is responsible for all wiring up to the terminal block connection inside the device. As well as ensuring the wire is properly sized for the amp draw and breaker selection per the electrical code in their area.

**Minimum footprint size for proper operation and cooling of the unit. Does not account for door sizes or obstructions in the room. (Footprint measurement is not the room size)

MEASUREMENTS

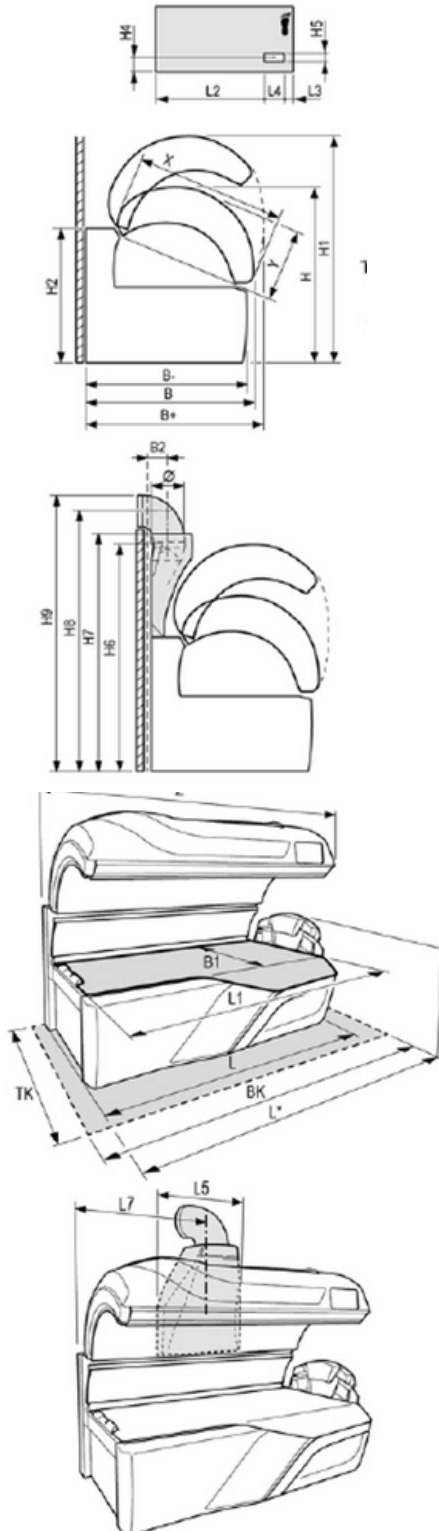

	in.	mm.
B+	53 2/20	1,350
B	52 5/6	1,342
B-	53 7/10	1,364
B1	42 13/25	1,080
B2	7 65/96	195
L*	92 37/58	2,353
L	88 17/90	2,240
L1	86 43/70	2,200
L2	70 43/91	1,790
L3	13 3/20	334
L4	4 21/29	120
L5	23 28/45	600
L7	44 5/53	1,120
H	60 2/51	1,525

	in.	mm.
H1	72 21/46	1,815
H2	43 4/13	1,100
H4	21 17/26	550
H5	4 21/29	120
H6	73 37/87	1,865
H7	75 2/3	1,922
H8	87 65/86	2,229
H9	92 21/31	2,354
X	41 21/62	1,050
Y	25 23/73	643
Z	87 3/5	2,225
Ø	11 73/90	300
BK	98 37/87	2,500
TK	90 43/78	2,300