




ERGOLINE VITALITY 50/4 TLT 3

LAMPS

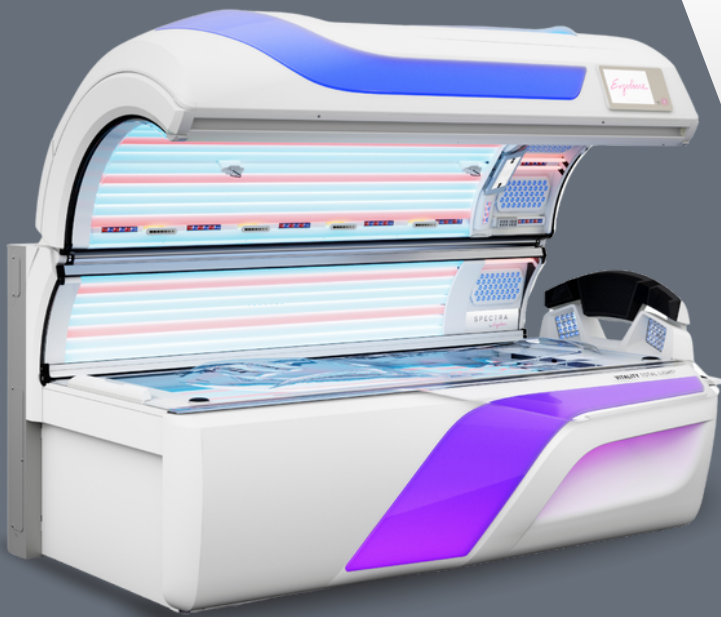

BENCH
18 @ 200W 71"

FACIAL
168 x UVA LEDs

SIDE
8 @ 200W 71"

SPAGHETTI
4 x 8W Genesis HLT

CANOPY
24 @ 200W 71"

SHOULDER
40 x UVA LEDs

LED TECHNOLOGY
Face: 24 x Red LEDs + 24 x Blue LEDs
Body: 30 x Red LEDs + 30 x Blue LEDs
Face & Shoulder: 208 x UVA-LEDs

POWER



RATED VOLTAGE
230 V

RATED AMP DRAW 3 Ø
40

RATED FREQUENCY
60 Hz

RATED AMP DRAW 1 Ø
72


RATED BREAKERS
50 amp 3-pole
90 amp 2-pole

POWER CONSUMPTION RATING
14,600 W

MAINS POWER CONNECTION

- The unit is configured from the factory for connection to 3-Phase power.
- A 1" liquid-tight connector is provided

PRODUCT SPECIFICATIONS



NOISE LEVEL 1M AWAY FROM DEVICE
62.5 dB

WEIGHT
approx. 1,177 lbs


NOISE LEVEL INSIDE THE DEVICE
75.2 dB

UNIT FOOTPRINT
98 7/16" X 90 9/16"

LOAD ON THE ACRYLIC PANEL
max. 330 lbs

OPERATING TEMPERATURES
59-89 °F





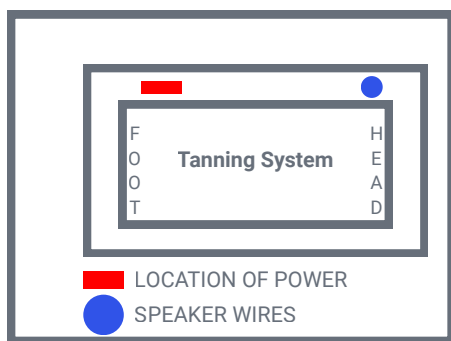

*Owner is responsible for all wiring up to the terminal block connection inside the device. As well as ensuring the wire is properly sized for the amp draw and breaker selection per the electrical code in their area.

**Minimum footprint size for proper operation and cooling of the unit. Does not account for door sizes or obstructions in the room. (Footprint measurement is not the room size)

MEASUREMENTS

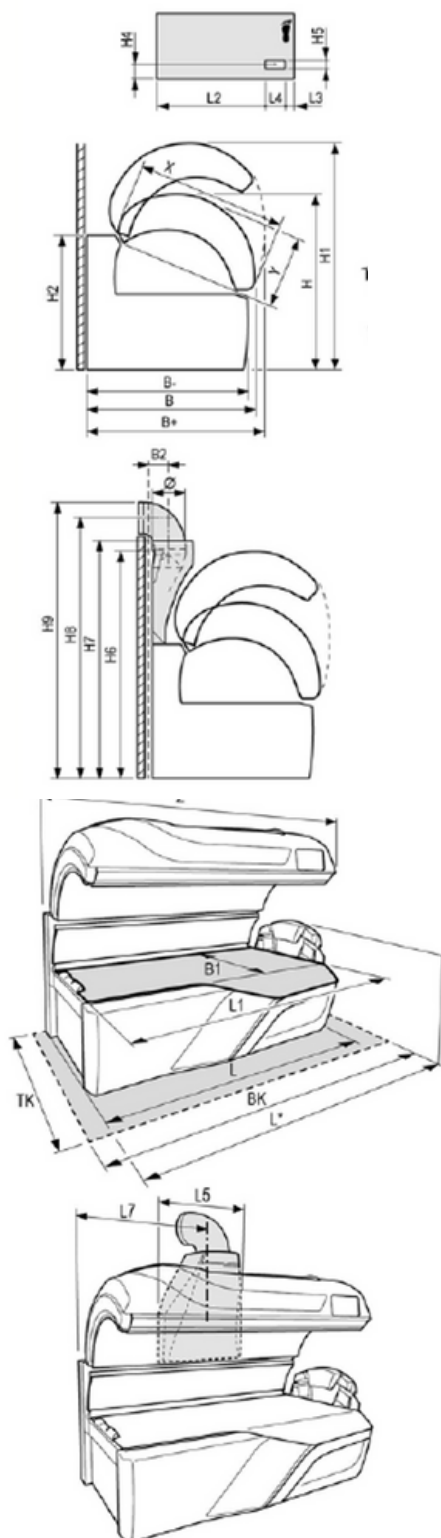

	in.	mm.
B+	56 6/8	1,440
B	56 5/16	1,430
B-	56 5/8	1,438
B1	45 4/8	1,155
B2	7 11/16	195
L*	92 5/8	2,353
L	88 7/16	2,247
L1	86 5/8	2,200
L2	70 4/8	1,790
L3	13 1/8	334
L4	4 3/4	120
L5	23 5/8	600
L7	44 1/8	1,120
H	60 13/16	1,545

	in.	mm.
H1	74 3/16	1,885
H2	43 5/16	1,100
H4	21 5/8	550
H5	4 6/8	120
H6	73 7/16	1,865
H7	75 11/16	1,922
H8	87 6/8	2,229
H9	92 11/16	2,354
X	44 9/16	1,132
Y	26 1/16	662
Z	87 5/8	2,225
Ø	11 13/16	300
BK	98 7/16	2,500
TK	90 9/16	2,300