

INSPIRATION 600

DYNAMIC PERFORMANCE





HIGHLIGHTS

- DYNAMIC PERFORMANCE
- AIR CONDITION
- NFC CONNECT
- STEREO SOUND



Ergoline

INSPIRATION 600 | DYNAMIC PERFORMANCE

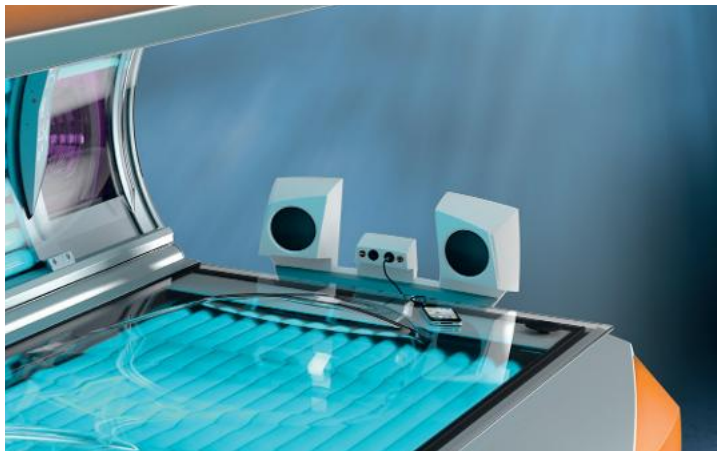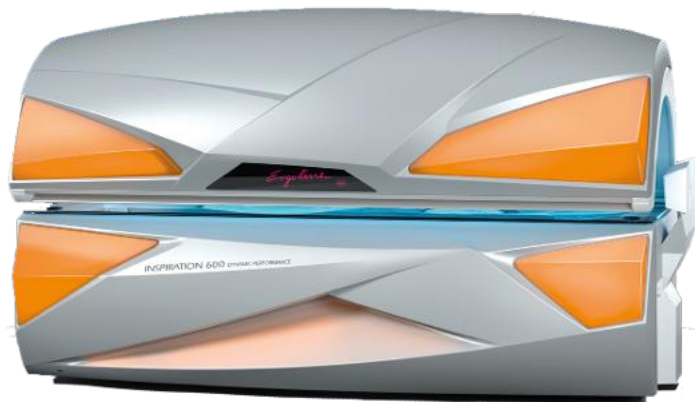

The Inspiration Series by Ergoline sets new standards in mid-level tanning for your salon. With dual circuit ventilation system, 3D Sound and NFC Connect the Inspiration 600 offers the kind of comfort you would otherwise only find at the top of the range. With 4 facial tanners and 42 UV lamps (Smart Performance), the Inspiration 600 is at the top end of the compact class. With 3 facial tanners and 38 UV lamps, the Inspiration 500 with Smart Performance technology offers outstanding tanning performance with energy savings.

ERGOLINE, A BRAND OF JK PRODUCTS & SERVICES, INC.

411 West Washington Avenue, Suite B | Jonesboro, AR 72401

☎ Toll-free: 888.771.0996 | www.ergoline.us

CONTRAINDICATIONS:

Follow Instructions. Avoid over-exposure as with natural sunlight. Over-exposure can cause eye or skin injury and allergic reactions. Repeated exposure may cause premature aging of the skin and skin cancer. ALWAYS WEAR PROTECTIVE EYEWEAR! Failure to do so may result in severe burns or long term injury to the eyes. Certain medications or cosmetics may increase your sensitivity to ultraviolet radiation. Consult a physician before using sunlamps if you are using medication, have a history of skin problems or believe yourself to be especially sensitive to sunlight. If you do not tan in the sun, you are unlikely to tan from the use of this product. Please refer to the recommended exposure schedule for your skin type and do not tan more than once in a 24-hour period. Attention: This sunlamp product should not be used on persons under the age of 18 years. Persons who should not use this device include anyone who is sunburned, has open wounds, is naturally pale, has discolored patches of skin, has an increased risk of skin cancer, is being treated for or taking medicine causing photosensitivity, is pregnant, has atypical moles or more than 16 moles on their body (2mm diameter or larger). © 2020 JK Products & Services, Inc.

PERFORMANCE	Session Time	10 minutes
	Technology	Dynamic Performance
	LED Technology	-
	Low pressure lamps	42 X 200 W
	Facial tanner	4 X 400 W
COMFORT	Spaghetti lamps	3 x 8 W
	Shoulder Tan	-
	Air conditioning	Air Condition Plus
	Ventilation	Comfort Cooling
	Aqua Fresh / Aroma	-
HANDLING	Sound	Stereo Sound System
	Smart phone connection	MP3 AUX
	Acrylic	Body Form Plus
	External display	-
	Internal display	✓
DESIGN	NFC Connect	✓
	Voice Guide	✓
	Set-up Manager	-
	Miscellaneous	-
	External lighting	LED Light Show
TECHNICAL SPECIFICATIONS	Internal lighting	LED Interior Light
	Dimensions closed	93-5/16 x 53-13/16 x 52-1/16
	Dimensions open (L x W x H in)	93-5/16 x 53-13/16 x 66-11/16
	Minimum Recommended Room Size (L x W ft)	8 x 7
	Unit Footprint (L x W in)	94-1/2 x 82-11/16
ELECTRICAL SPECIFICATIONS	Max. power consumption with 400/415 V 3N power supply with 230 V 1N power supply	13,200 W
	Fuse (delayed action)	50 amp 3 phase 80 amp single phase
	Weight	1,211 lb
	Rated frequency	60 Hz
	Rated voltage	230 V
	Rated amp draw 3 (zero with slash)	50
	Rated amp draw 1 (zero with slash)	84
	Mains Power Connection	The unit is configured from the factory for connection to 3-Phase power. A 1" liquid-tight connector is provided. *Owner is responsible for all wiring up to the terminal block connection inside the device. As well as ensuring the wire is properly sized for the amp draw and breaker selection per the electrical code in their area.
	Load on the acrylic panel	max. 330 lbs.
	Operating Temperature	59-89 (degrees) F
	Number of body lamps	Base: 20 @200W 71" Canopy: 32 @200W 71"