

PRESTIGE 1400

INTELLIGENT PERFORMANCE




HIGHLIGHTS

- INTELLIGENT PERFORMANCE
- 3-ZONE VENTILATION WITH TEMPTRONIC PLUS
- NFC CONNECT
- EXTERIOR CONTROL PANEL

Ergoline

PRESTIGE 1400 | INTELLIGENT PERFORMANCE

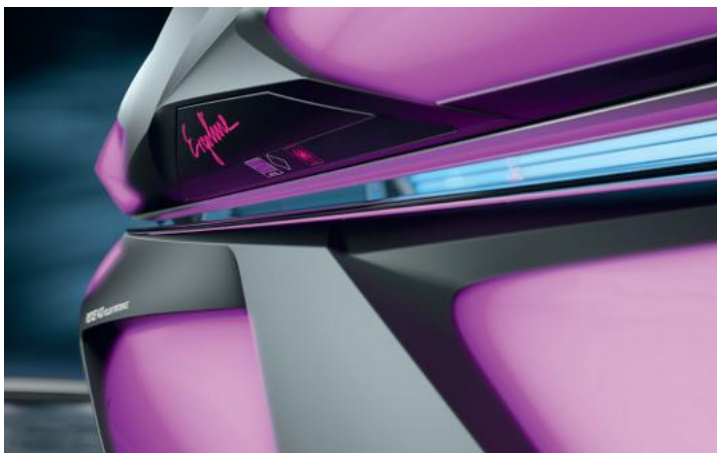

The Prestige lives up to its name in every sense, bringing luxury and performance to mid- and top-level tanners. The LED Light Show dynamic color schemes can be set to match salon décor or seasonal colors, while the sunbed's dramatic angles and design complement this stunning illumination. On the inside, the Intelligent Performance Technology ensures quicker and deeper tanning results by adjusting the lamps' output automatically for the most even and dark all-over tan. NFC Technology brings a new level of personalized customer service to each session. Providing your customers with a high-end amenities, such as a personal VIP card that allows them to save their preferred settings for future sessions. The personal VIP card ensures they will be greeted by name and will enjoy all features adjusted to their personal comfort preferences. No comfort feature has been overlooked with the Prestige Series.

ERGOLINE, A BRAND OF JK PRODUCTS & SERVICES, INC.

411 West Washington Avenue, Suite B | Jonesboro, AR 72401

☎ Toll-free: 888.771.0996 | www.ergoline.us

CONTRAINDICATIONS:

Follow Instructions. Avoid over-exposure as with natural sunlight. Over-exposure can cause eye or skin injury and allergic reactions. Repeated exposure may cause premature aging of the skin and skin cancer. ALWAYS WEAR PROTECTIVE EYEWEAR! Failure to do so may result in severe burns or long term injury to the eyes. Certain medications or cosmetics may increase your sensitivity to ultraviolet radiation. Consult a physician before using sunlamps if you are using medication, have a history of skin problems or believe yourself to be especially sensitive to sunlight. If you do not tan in the sun, you are unlikely to tan from the use of this product. Please refer to the recommended exposure schedule for your skin type and do not tan more than once in a 24-hour period. Attention: This sunlamp product should not be used on persons under the age of 18 years. Persons who should not use this device include anyone who is sunburned, has open wounds, is naturally pale, has discolored patches of skin, has an increased risk of skin cancer, is being treated for or taking medicine causing photosensitivity, is pregnant, has atypical moles or more than 16 moles on their body (2mm diameter or larger). © 2020 JK Products & Services, Inc.

PERFORMANCE	Session Time	10 minutes
	Technology	Intelligent Performance
	Low pressure lamps	52 x 200 W
	Facial tanner	4 x 520 W Ultra Performance Plus
	Spaghetti lamps	3 x 8 W
COMFORT	Shoulder Tan	2 x 240 W
	Air conditioning	Fan Cooling Plus
	Ventilation	Comfort Cooling Plus
	Aqua Fresh / Aroma	✓ / ✓
	Sound	3D Sound System
HANDLING	Smart phone connection	MP3 AUX
	Acrylic	Multi Relax (86.6 x 37.4 in)
	External display	Control Center
	Internal display	✓
	NFC Connect	✓
DESIGN	Voice Guide	✓
	Set-up Manager	Professional Set-up Manager
	Miscellaneous	–
	External lighting	LED Light Show
	Internal lighting	LED Interior Light
TECHNICAL SPECIFICATIONS	Dimensions closed	93-11/16 x 61-13/16 x 59-1/16
	Dimensions open (L x W x H in)	93-11/16 x 61-13/16 x 77-11/16
	Minimum Recommended Room Size (L x W ft)	10 x 9
	Unit Footprint (L x W in)	98-7/16 x 90-9/16
	Max. power consumption with 400/415 V 3N power supply with 230 V 1N power supply	17,600 W
ELECTRICAL SPECIFICATIONS	Fuse (delayed action)	70 amp 3 Ø 110 amp single Ø
	Weight	1,554 lb
	Rated frequency	60 Hz
	Rated voltage	230 V
	Rated amp draw 3 Ø	50
	Rated amp draw 1 Ø	84
	Mains Power Connection	The unit is configured from the factory for connection to 3-Phase power. A 1" liquid-tight connector is provided. *Owner is responsible for all wiring up to the terminal block connection inside the device. As well as ensuring the wire is properly sized for the amp draw and breaker selection per the electrical code in their area.
	Load on the acrylic panel	max. 330 lbs.
	Operating Temperature	59-89 (degrees) F
	Number of body lamps	Base: 20 @200W 71" Canopy: 32 @200W 71"